


RANDOM SEALERS

AUTO-ADJUSTING CASE SEALERS FOR RANDOM CASES



TBS-100R 20
Random Case Sealer

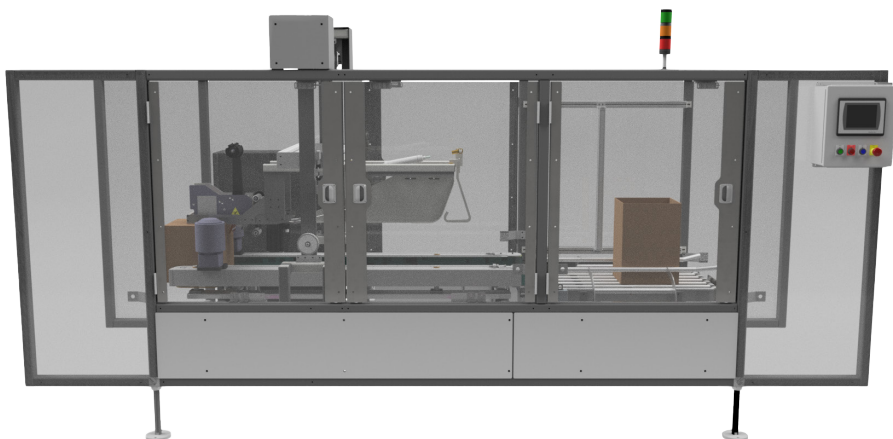

TBS-100RH 12
Random Height Case Sealer

RANDOM SEALERS

SPECIFICATIONS	TBS-100RH 12	TBS-100R 12	TBS-100R 20
Max. Speed	12 CPM	12 CPM	20 CPM
Max. Case Range	24" x 16" x 18"	24" x 20" x 24"	20" x 16" x 24"
Min. Case Range	8" x 6" x 5"	5" x 5" x 4"	5" x 5" x 4"
Case Modification Available	N/A	N/A	N/A
Glue Option	Y	N/A	N/A
IP 56/NEMA 4X	Y	N/A	N/A
Std. Voltage	240V/3PH	240V/3PH	240V/3PH
SCFM - 80 PSI - 3/4 Supply Line	5 SCFM	2 SCFM	3 SCFM
Footprint	6'6" x 5'3" x 6"	9'6" x 5'8" x 6'2"	10' x 6' x 6'3"
Approx. Shipping Weight	~1200 lbs.	~1200 lbs.	~2000 lbs.
Std. Electrical Components	A-B CompactLogix 5380/5069 L306ERM PLC STUDIO 5000 Ver. 34 Software PanelView + 7.7" Interface		A-B CompactLogix 5380/5069 L310ERM PLC STUDIO 5000 Ver. 34 Software PanelView + 7.7" Interface
Std. Finish	Steel Plus 316 is a two component, water base epoxy filled with 316 stainless steel flake. Finish Color is a Steel-It Grey and is USDA and FDA accepted.		
Available Options	Low Tape, Casters, Stack Lights, Elevation Kits, Bar Code Readers, Spare Parts		