

**MACHINE SPECIFICATIONS:**

**VOLTAGE:**

-2EZ-A15: 115V/1PH/60HZ-15AMP ⊗

-2EZA20/25/30: 220V/3PH/60HZ-30AMP ⊗

NEMA RATING: 12

AIR: 80PSI, 3/4 SUPPLY LINE ⊗

CONSTRUCTION: MILD STEEL-PAINTED

RELATIVE HUMIDITY: 30%-60%

AMBIENT TEMPERATURE: 34°-100°



CASE: RSC, 175-275 LB TEST

**PROJECT DETAILS:**

2EZ-A15/20/25/30 CASE ERECTOR/BOTTOM TAPER





-2" 3M NPH+ TAPE HEAD

# EZ ADVANTAGE SERIES

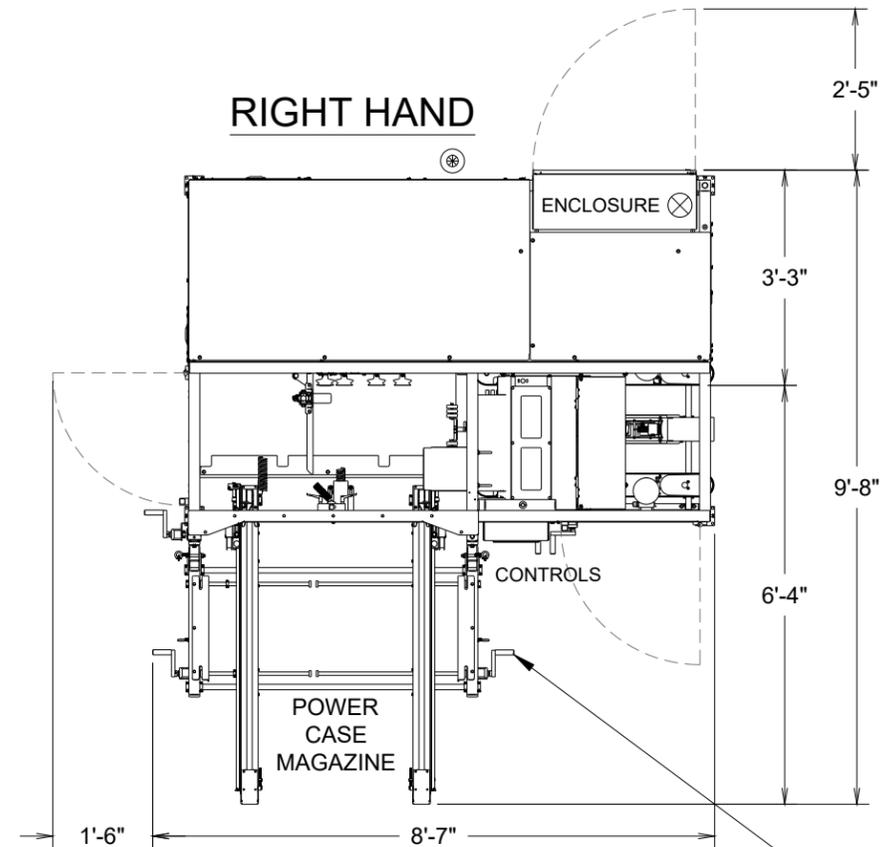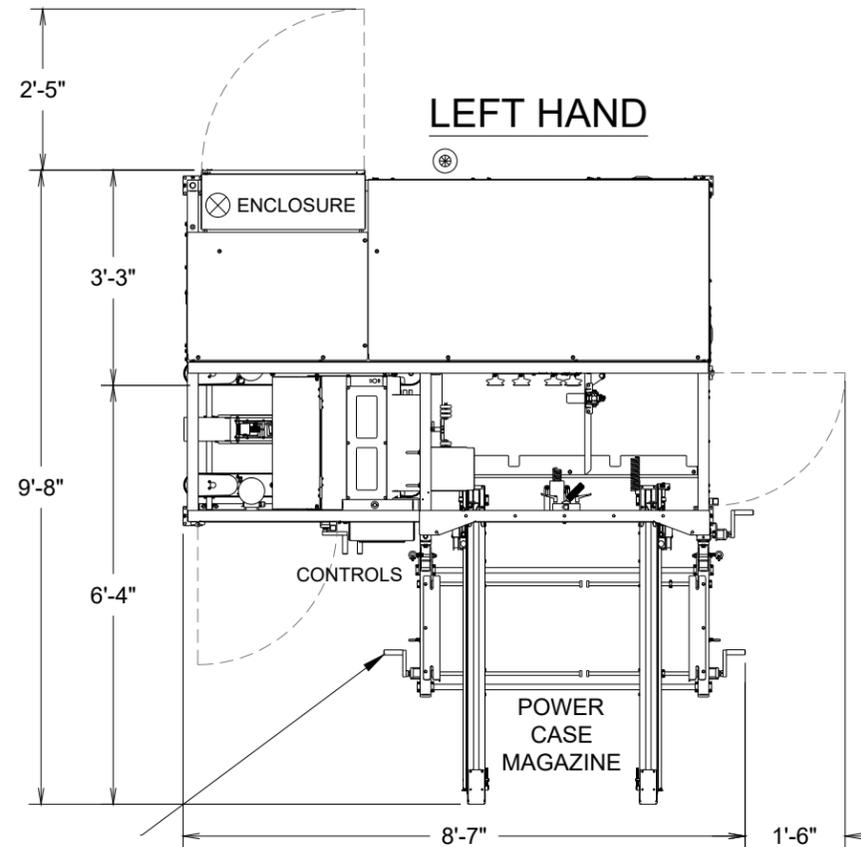

ADDITIONAL MAGAZINE ADJUSTMENT  
STANDARD ON 2EZA-15  
\*ONLY PRESENT ON 2EZA-20/25/30  
WHEN A SHORT CASE LENGTH  
MODIFICATION IS REQUIRED\*

ADDITIONAL MAGAZINE ADJUSTMENT  
STANDARD ON 2EZA-15  
\*ONLY PRESENT ON 2EZA-20/25/30  
WHEN A SHORT CASE LENGTH  
MODIFICATION IS REQUIRED\*

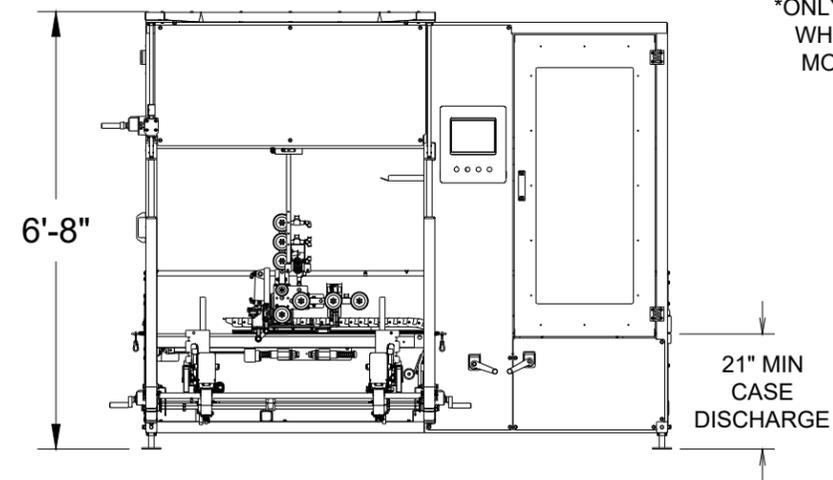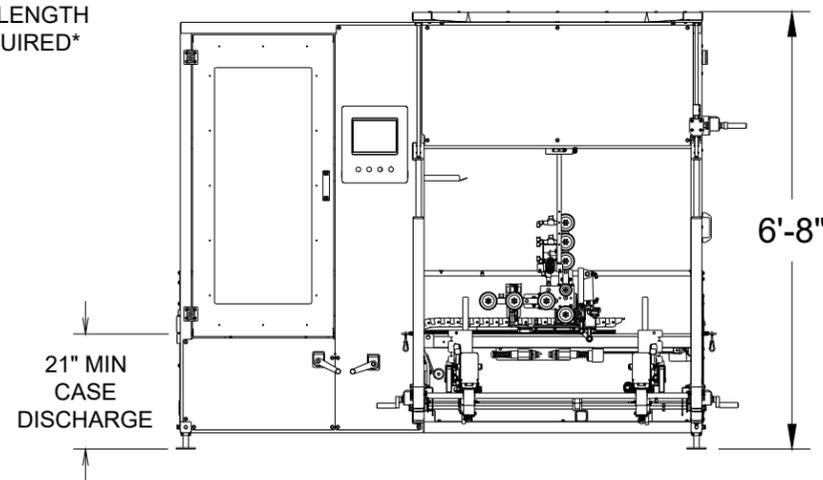

	<b>COMBI PACKAGING SYSTEMS LLC</b> 6299 Dressler RD NW Canton, OH 44720 1-800-521-9072				
	PROJECT <b>EZ Advantage</b>				
NOTE: THIS DRAWING IS NOT TO BE REPRODUCED OR COPIED WITHOUT CONSENT FROM COMBI PACKAGING SYSTEMS		TITLE <b>CASE ERECTOR</b>			
TOLERANCE: UNLESS OTHERWISE SPECIFIED LINEAR = +/- .4" ANGULAR = +/- .1" ELEVATION = +/- .1"		SIZE <b>B</b>	DRAWN <b>MAN</b>	DATE <b>071725</b>	DWG NO <b>XXXXX</b>
<b>DO NOT SCALE</b>		SCALE <b>NS</b>	CHECKED	DATE	REV <b>X</b>
				SHEET <b>1 OF 1</b>	